



Pivot door hinges

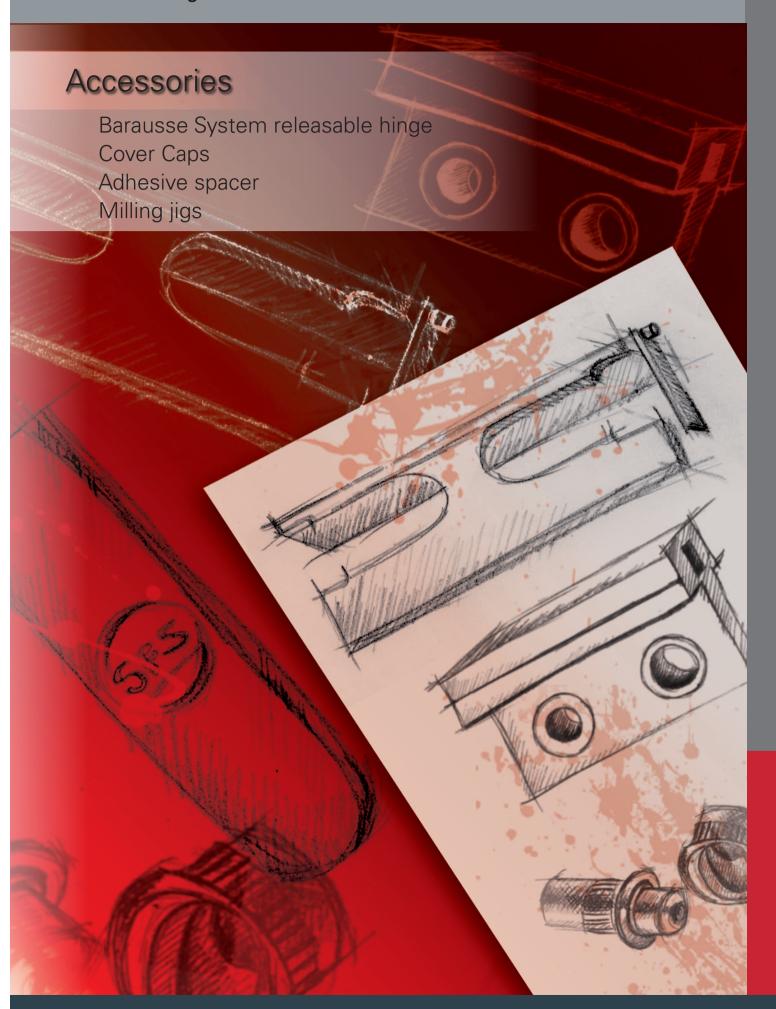


Barausse System releasable hinge for pivot door hinges

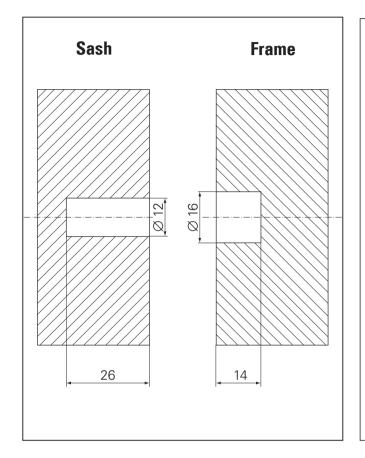

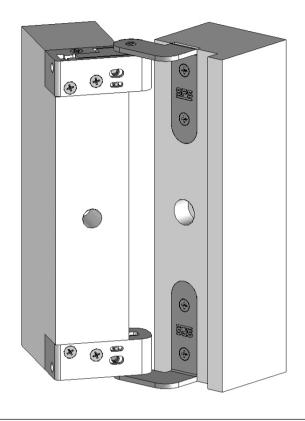

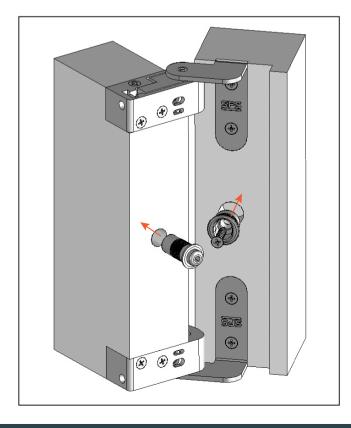

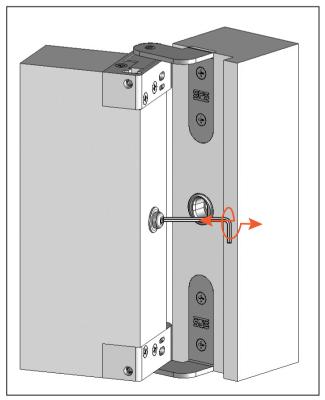


Barausse System releasable hinge



Ordering codes	
1188866	

Cover Caps







Ordering codes	Finish	Packaging
768006	White	12 pcs.
768007	Brown	12 pcs.
771111	Black	12 pcs.
766666	Brassed	12 pcs.
766667	Chromated	12 pcs.
1100909	Matt chrome	12 pcs.

Adhesive spacer to rest on 1 mm floor for CAB-R 3D and CAB-R, CIR and CAB square

Packaging
60 pcs.

Milling jigs

Milling jigs for CAB-R



Ordering codes

1272078

Milling jigs for CIR



Ordering codes

1272271


Jig for Barausse System releasable hinge




Ordering codes		
1272788		

Technical data CAB-R 3D


Technical drawings



Male without milling			
For panels between 40 and 45 mm	For panels between 35 and 40 mm		
a1 = 29,0	a1 = 29,0		
a2 = 25,0	a2 = 25,0		
b = 62,5	b = 55,5		
c1 = 60,0	c1 = 60,0		
c2 = 22,0	c2 = 22,0		
d = 20,0	d = 20,0		



Male with milling			
For panels between	For panels between		
40 and 45 mm	35 and 40 mm		
a1 = 32,0	a1 = 32,0		
a2 = 25,0	a2 = 25,0		
b = 62,5	b = 55,5		
c1 = 60,0	c1 = 60,0		
c2 = 22,0	c2 = 22,0		
d = 20.0	d = 20.0		





Horizontal adjustment: adjust screw «X», using a 4mm Allen key to obtain a \pm 1.5mm adjustment.

Height adjustment: adjust screw «Y», using a 4mm Allen key to obtain a 0/+3mm adjustment.

Gasket pressure adjustment: adjust screw «Z», using a 4mm Allen key to obtain a \pm 2mm adjustment.

Milling diagrams



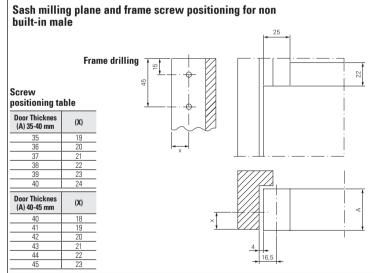

Finishes and codes

	Ordering codes	Finish	Packaging
For panels	1272698 Male without milling	Matt chrome	6 pairs
between 40 and 45 mm	1158391 Male without milling	Brassed	6 pairs
	1272699 Male with milling	Matt chrome	6 pairs
	1158392 Male with milling	Brassed	6 pairs


drawings available in .dxf format upon request


	Ordering codes	Finish	Packaging
For panels	1272805 Male without milling	Matt chrome	1 pair*
between 35 and 40 mm	1197702 Male without milling	Brassed	1 pair*
	1272806 Male with milling	Matt chrome	1 pair*
	1197705 Male with milling	Brassed	1 pair*

^{* 1} pair = 1 door


Technical data CAB-R

Technical drawings





Adjustment instructions

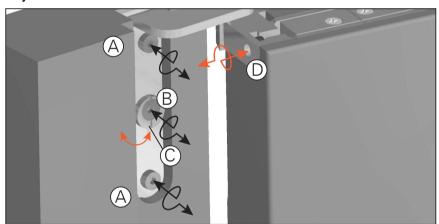


Depth adjustment

Loosen screws (A) and (B) and adjust eccentric screw (C) to adjust depth.


Lateral adjustment

Adjust screw D

Milling diagrams



Finishes and codes




Ordering codes	Finish	Packaging
1272070	Matt chrome plated	6 pairs
516543	Gold colour	6 pairs


drawings available in .dxf format upon request


^{* 1} pair = 1 door


Technical data CAB - CAB square

Technical drawings CAB











Milling diagrams





We recommend using both washers in the lower part to rest on the floor.

Finishes and codes

CAB

	Ordering codes	Finish	Packaging
	1272496	Brassed	10 pairs
	954008	Matt nickel	10 pairs


drawings available in .dxf format upon request


CAB square

Ordering codes	Finish	Packaging
1164668	Brassed	40 pairs
1272701	Matt chrome	10 pairs


^{* 1} pair = 1 door

Technical data CIR

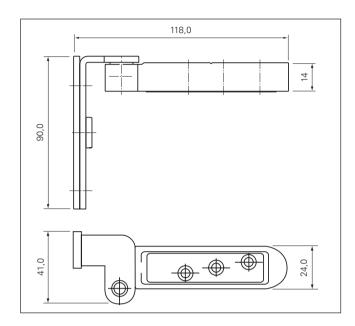



Adjustment instructions

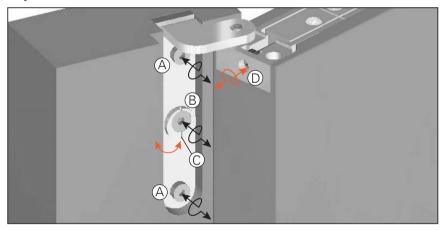


Depth adjustment

Loosen screws (A) and (B) and adjust eccentric screw (C) to adjust depth.


Lateral adjustment

Adjust screw D

Milling diagrams



Finishes and codes



	Ordering codes	Finish	Packaging
Hinge	1272272	Zinc	6 pairs

drawings available in .dxf format upon request



^{* 1} pair = 1 door

Specifications

Model	Description
CAB-R-3D-001	Design pivot hinge for 40-45 mm flush fit doors without milling on the frame and a maximum weight of 80 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Reversible door and frame. Adjustable in 3 dimensions (height: 0/+3mm; horizontal: +/- 1,5mm; gasket pressure: +/-2mm) with only one Allen key. 180° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed.
CAB-R-3D-002	Design pivot hinge for 40-45 mm flush fit doors with milling on the frame and a maximum weight of 80 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Reversible door and frame. Adjustable in 3 dimensions (height: 0/+3mm; horizontal: +/- 1,5mm; gasket pressure: +/-2mm) with only one Allen key. 180° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed.
CAB-R-3D-003	Design pivot hinge for 35-40 mm flush fit doors without milling on the frame and a maximum weight of 80 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Reversible door and frame. Adjustable in 3 dimensions (height: 0/+3mm; horizontal: +/- 1,5mm; gasket pressure: +/-1mm) with only one Allen key. 180° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed.
CAB-R-3D-004	Design pivot hinge for 35-40mm flush fit doors with milling on the frame and a maximum weight of 80 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Reversible door and frame. Adjustable in 3 dimensions (height: 0/+3mm; horizontal: +/- 1,5mm; gasket pressure: +/-1mm) with only one Allen key. 180° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed.
CAB-R	Design pivot hinge for flush fit doors of 38 mm minimum panel and a maximum weight of 70 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Adjustable in 2 dimensions (horizontal: +/- 3mm; gasket pressure: +/-1,5mm) with only one Allen key. 180° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed. Cover caps available in different finishings.
CAB-00-02	Design pivot hinge for timber and/or aluminium flush fit doors of a maximum weight of 35 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. 180° opening. Self-lubricating washers provide a smooth and silent movement. Finishings: matt chrome and brassed.
CAB-022 (square)	Design pivot hinge for timber and/or aluminium flush fit doors of a maximum weight of 50 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. 180° opening. Self-lubricating washers provide a smooth and silent movement. Finishings: matt chrome and brassed.
CIR-00-03	Design pivot hinge for flush fit doors of 40 mm minimum panel and a maximum weight of 70 kilos. The installation of the hinge does not require any operation on the ceiling and on the floor. Right and left handed. Adjustable in 2 dimensions (horizontal: +/- 3mm; gasket pressure: +/-1,5mm) with only one Allen key. 110° opening. Self-lubricating bushes provide a smooth and silent movement. Finishings: matt chrome and brassed. Cover caps available in different finishings.





www.sfsintec.biz/ch/fs030



made in Italy

SFS intec S.r.l.

Via Castelfranco Veneto, 71 IT-33170 Pordenone Tel. 0434 99 51 Fax 0434 995201 it.info@sfsintec.biz www.sfsintec.biz/it

