

PRODUCT CATALOGUE






The Fantom Doorstop Solution provides a high-quality innovative solution for all project application requirements.

The flush-mounted pin alleviates trip hazards whilst maintaining a modern desirable finish. The concealed rare earth magnet technology ensures exceptional mechanical functionality.

- > Flush-mounted
- > Rare earth magnet induced hold-open device
- > No trip hazard
- > Streamlined modern finish
- > Suitable for single and double leaf doors
- > Suitable for various fixing positions
- > Quick and easy installation

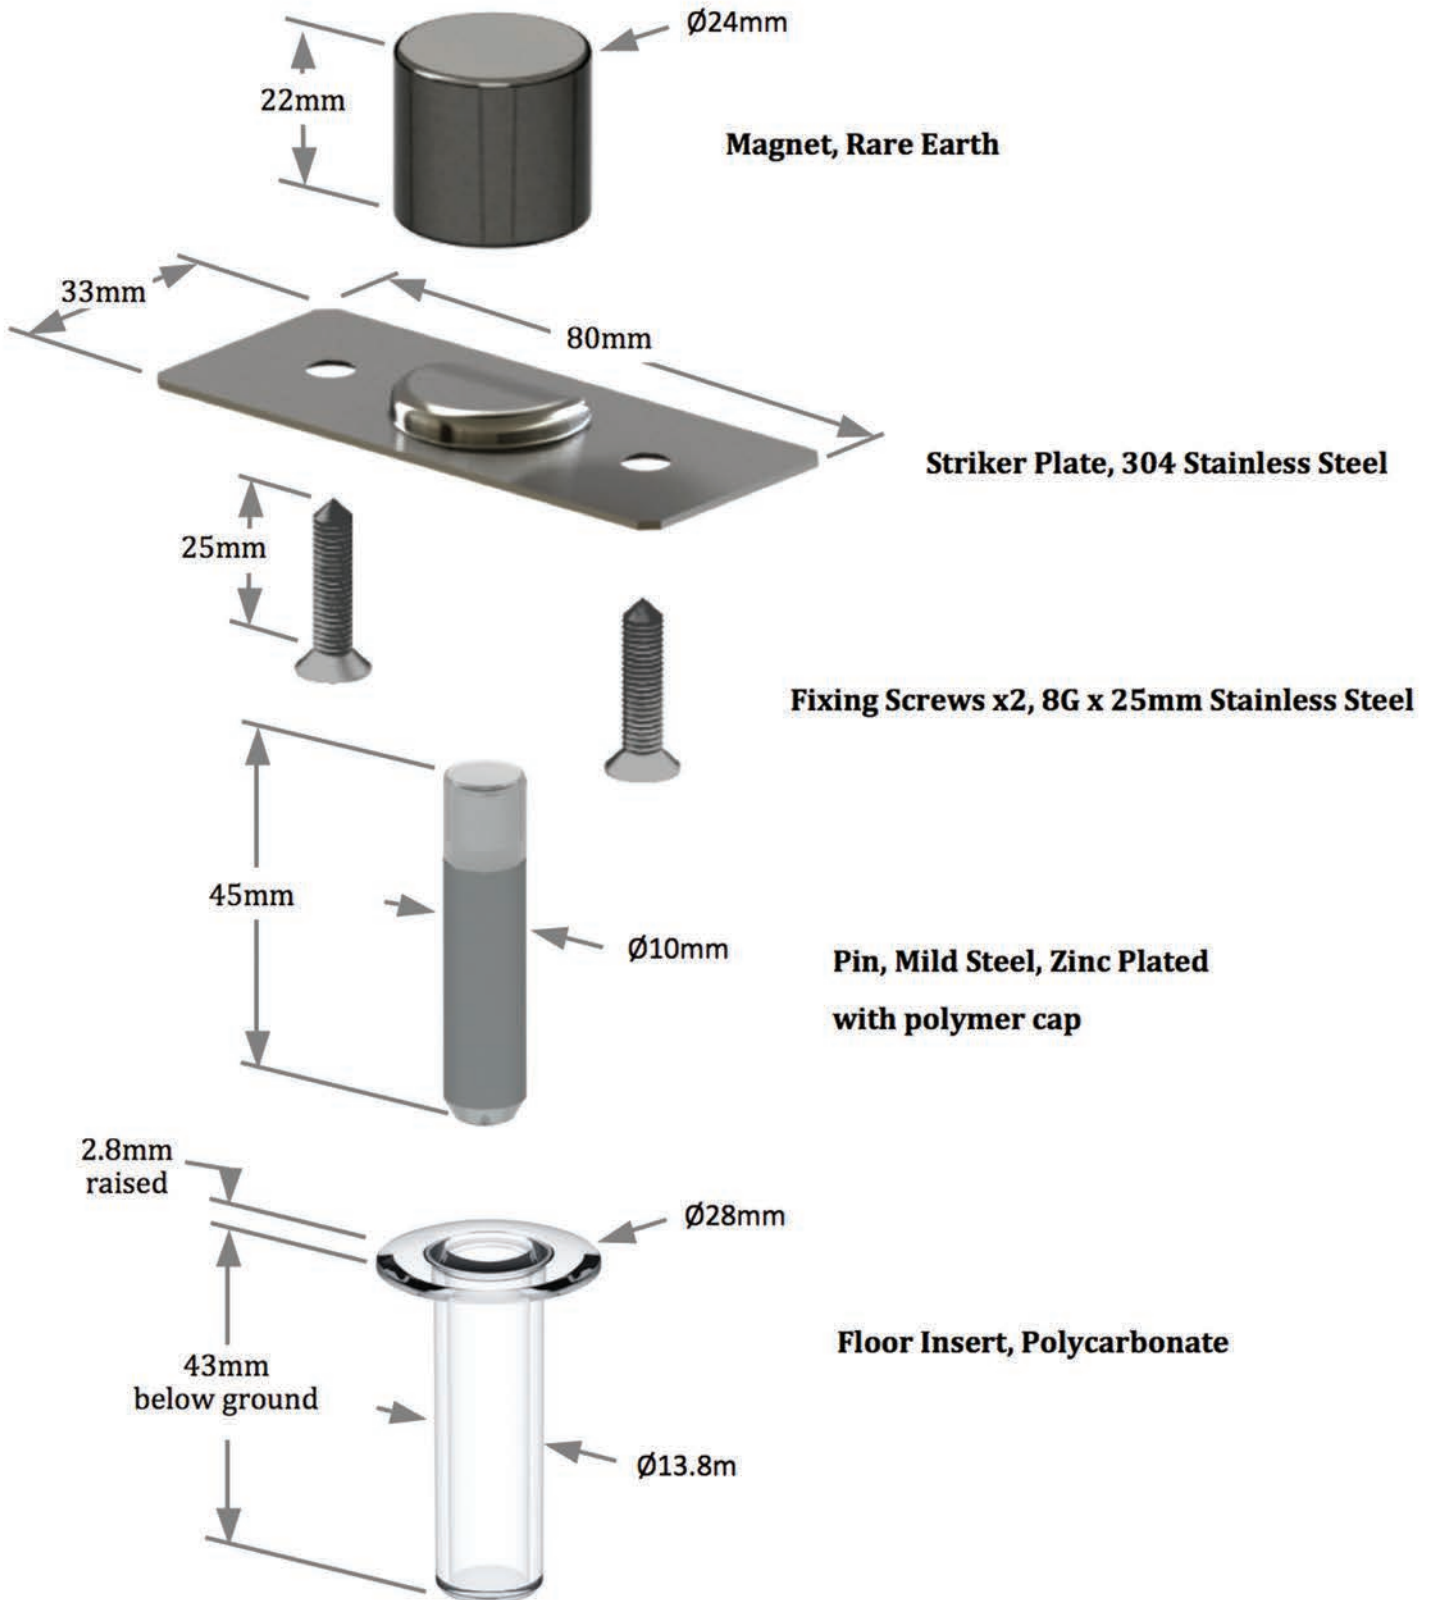



FANTOM DOORSTOP CLAMSHELL

CODE

> FDS-CLAM

DESCRIPTION

Fantom Doorstop Solution packaged in retail clamshell packaging. Best used for hanging or sitting on retail shelf.

FANTOM DOORSTOP TRADE PACK

CODE

> FDS-TP

DESCRIPTION

Fantom Doorstop Solution packaged in a trade box for more effective shipping methods. Best used when supplying direct to trade.



4 PIECE DISPLAY BOX

CODE

> 4PDIS-CLAM

SIZE

> 305mm (L) x 120mm (W) x 175mm (H)

DESCRIPTION

This box is designed for retailers who have shelf space, or as a display to leave on the front counter. It comes in 2 pieces with the top half simply sliding off to reveal the 4 units.



INSTALLATION KIT

CODE

> INSTALL

DESCRIPTION

All tools (minus power tools) required to install the Fantom Doorstop.



FLOOR SLEEVE

CODE

- > PLSLEEVE-BK
- > PLSLEEVE-WH
- > PLSLEEVE-CL

COLOURS

- > Black
- > White
- > Clear

DESCRIPTION

Floor sleeve used in conjunction with floor pin, requires a 14mm x 50mm (loose fit) hole when being installed.

PREMIUM FLOOR SLEEVE

CODE

- > B SLEEVE-B
- > B SLEEVE-CH
- > B SLEEVE-AL

COLOURS

- > Brass
- > Chrome
- > Brushed Alloy

DESCRIPTION

Premium floor sleeve. Solid Brass with either polished or chrome/brushed plated finish. Requires a 14mm x 50mm (loose fit) hole when being installed.



STEEL PIN

CODE

- > PIN

DESCRIPTION

Standard steel pin. For use in conjunction with nylon striker plate. Standard pin and nylon striker plate is used for a silent activation on solid core doors.

OVERMOULDED PIN

CODE

- > OMPIN-BK
- > OMPIN-WH
- > OMPIN-CL

COLOURS

- > Black
- > White
- > Clear

DESCRIPTION

OM pin or premium pin is used to colour match with the colour of the sleeve chosen. The OM pin is smooth and quiet in activation.



DIMPLE + LIP STRIKER

CODE

> STRIKELIP-SS

DESCRIPTION

This is our standard striker plate and can be used for gaps between 9mm -15mm. It is recommended to keep gaps as tight as possible by using the Fantom 5mm packer if required.



PREMIUM STRIKER

CODE

> STRIKE-SS

DESCRIPTION

For use on all doors. Premium SS striker can be used on doors with gaps as low as 4mm and as high as 15mm. Doors with gaps of 10mm and above are encouraged to use a Fantom 5mm packer.



PIVOT STRIKER

CODE

> STRIKE-P-SS

DESCRIPTION

The pivot strike has no stopping feature but will still hold the door in it's location when engaged. It allows the door to pass over in either direction making it perfect for pivot and sliding doors, or for holding doors ajar for ventilation.



NYLON STRIKER PLATE

CODE

> STRIKE-NY

COLOURS

> White

DESCRIPTION

For use on solid and hollow doors in conjunction with steel pin. Nylon striker plate is hard wearing for prolonged use with smooth and quiet activation/deactivation.



NYLON STRIKE PLATE + LIP

CODE

> STRIKELIP-NY

COLOURS

> White

DESCRIPTION

For use on solid and hollow doors in conjunction with steel pin when door passing over pin is especially of concern.



PACKER

CODE

> PACKER-5

COLOUR

> Clear

DESCRIPTION

For use when doors have a gap exceeding 10mm. The packer brings down the height of the striker plate and magnet to achieve a lower gap.



RARE EARTH NEODYMIUM MAGNET

CODE

> MAG

DESCRIPTION

Rare Earth Neodymium Magnet for use in conjunction with all Fantom Doorstop models. Requires 24mm spade drilled hole when installing.



MAGNET HOUSING

CODE

> 33MAGHOU

SIZE

> Diameter 26.74mm (min 27mm Hole)
28.5mm Deep

DESCRIPTION

The magnet housing has been designed to allow installation in hollow extrusion such as aluminium or steel framed doors. It prevents the magnet from being lost inside the extrusion. Can also be used on hollow core doors if necessary.



FACE MOUNT - CHROME

CODE

- > FM-CH/F

COLOURS

- > Chrome
- > Brushed Alloy

DESCRIPTION

Chrome plated cast alloy facemount. No hold-open device. Designed to be used with doors that have automatic door closers installed.

All Facemount options come with a Stainless Steel Backing Plate.



FACE MOUNT

CODE

- > FM-PL/HO

COLOURS

- > White (Paintable)

DESCRIPTION

Facemount for retrofit, doors with large gaps caused by thresholds and general use. Hold-open dimple included.

All Facemount options come with a Stainless Steel Backing Plate.





FIRE RATED FANTOM DOORSTOP

CODE

> FDS FIRE

DESCRIPTION

Full fire rated kit, including chrome plated facemount, premium chrome sleeve and pin, N33 magnet and 4x SS screws. For use on fire rated doors. NO hold-open device to meet fire standards.



FANTOM HARDWARE - FANTOM STOP

> www.fantomhardware.ca

> sales@fantomhardware.ca